

# FOR THE MOST BEAUTIFUL FLOORS IN THE WORLD

OUR COATINGS SYSTEMS FOR PARQUET







- **5 I COMPETENCE IN LACQUER** PLANTAG coatings
- **6 I PLANATUR** Our oils for parquet
- 9 | PLANTALUX Our UV lacquers for parquet
- 12 | PLAQUADUR Sealing and repair in situ
- 13 | PLACURA Our care and cleaning products for parquet
- 14 | PLANTAG EXTRA Complementary products

## DISCOVER OUR SURFACE SOLUTIONS

FOR PARQUET



## **COMPETENCE IN LACQUER**

## KNOW-HOW AND ADDED VALUE — THE PERFECT SURFACE

Since 1953, we've evolved from a medium-sized company to a global group. To this day the company remains a family-run concern. Thanks to our international network of subsidiaries, dealers and representatives, we can guarantee that we're never far away. We know the local markets and circumstances.

As a producer of lacquers, Plantag is a specialist in surface technologies. We can always come up with suitable, innovative solutions for your product portfolio and your individual production conditions. Our experience and commitment to creating something special are what sets us apart from the crowd. We have long-standing, satisfied customers from a wide range of industry sectors all over the world. With our sound knowledge, focus on service and innovative products we continuously create added value for our customers


You can rely on our competence in lacquer.





## **PLANATUR** FOR TRADE USE

- Cobalt and VOC-free
- Complies with the limit values in the Decopaint guideline from 2004
- Disperses very well even across large surfaces
- Available in various colours
- Can be applied by hand using a cloth (dries overnight)



**Basic sanding** 

Base coat | Deco-oil 660


Finish | Deco-oil 660

Deco-Oil basic colours for mixing





- Aromatic compound and cobalt-free
- Achieve more than 95% of the requirements of DIN EN 13442
- Meets the requirements of DIN EN 12720
- Disperses very well without clogging brushes or pads
- Can be applied using a cloth, brush, roller or by spraying
- Medium drying time depending on production conditions
- Various coloured oils and care products round off the range



#### **Basic sanding**


Base coat | 77328.40c | 10-15 g/m<sup>2</sup> | Drying time 3-5 h

Finish | 77328.40c | 10-15 g/m<sup>2</sup> | Dries overnight



## **PLANATUR**FOR INDUSTRIAL USE

- Aromatic compound and cobalt-free
- Achieve more than 95% of the requirements of DIN EN 13442
- Meets the requirements of DIN EN 12720
- Roller would be the recommended form of application
- Disperses well and is suitable for industrial production
- Various coloured oils and care products round off the range



#### **Basic sanding**

**Base coat | 77328.42** | 10-15 g/m<sup>2</sup> | Industrial drying

Finish | 77328.42 | 10-15 g/m<sup>2</sup> | Industrial drying

Standard mixed colours for industrial and semi-industrial application














We work responsibly to develop almost emission-free lacquers. With the help of our market analysis, we've done an in depth look at the needs of our consumers. With our flexible interchangeable system combinations, all of our UV lacquers meet the needs of our customers and the market. With our Classicline, Comfortline and Highline product ranges, you can define your exact requirement profile. UV lacquers from PLANTAG are available in clear and pigmented versions as well as in various gloss levels. If necessary, we will adapt our products to your production conditions.

# PLANTALUX OUR UV LACQUERS FOR PARQUET

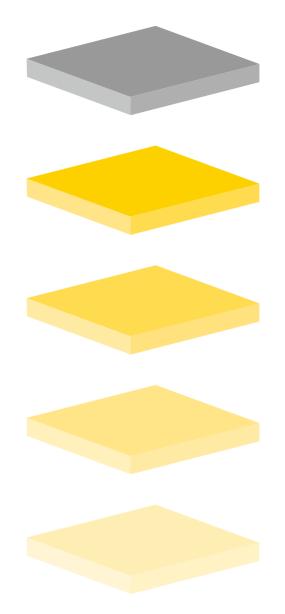

#### **Basic sanding**

## PLANTALUX Primer 75035.9

- Water-based
- Excellent adhesion
- Can be coloured

## PLANTALUX Base coat 78722.5

- Very good wear resistance
- High transparency
- Can be coloured

## PLANTALUX Base coat 78722.8

Extends the service life of your sanding belts

#### **B** nds the service life of

**PLANTALUX Finish 78723.11** (Gloss 10) **78723.31** (Gloss 30)

- Homogeneous appearance
- Very high scratch resistance

## PLANTALUX Primer 74170.1

- 100% UV
- Very good adhesion
- Can be coloured

## PLANTALUX Base coat

- **Excellent wear resistance**
- Very high transparency
- Can be coloured

## PLANTALUX Finish 78723.10c (Gloss 10)

- Homogeneous appearance
- Excellent scratch resistance

# CLASSICLINE, COMFORTLINE AND HIGHLINE OUR PLANTALUX QUALITY LEVELS

Our system products can be combined to create the CLASSICLINE, COMFORTLINE AND HIGHLINE quality levels. Decide for yourself!

	Cross-cut test (adhesion)	Hamberger plane (scratch resistance)	Striking pen (impact resistance)	Falling sand (wear resistance)
PLANTALUX I CLASSICLINE				
<b>Basic sanding PLANTALUX primer   75035.9</b>   10 – 15 g/m <sup>2</sup> <b>PLANTALUX base coat   78722.5</b>   30 – 50 g/m <sup>2</sup> <b>PLANTALUX base coat   78722.8</b>   10 – 15 g/m <sup>2</sup> <b>PLANTALUX finish   78723.10c</b>   10 – 20 g/m <sup>2</sup>	+	#	#	+
PLANTALUX I COMFORTLINE				
Basic sanding  PLANTALUX primer   75035.9   10 – 15 g/m <sup>2</sup> PLANTALUX base coat   78722.1   30 – 50 g/m <sup>2</sup> PLANTALUX base coat   78722.8   10 – 15 g/m <sup>2</sup> PLANTALUX finish   78723.10c   10 – 20 g/m <sup>2</sup>	# #	0	0 0	0
PLANTALUX I HIGHLINE				
<b>Basic sanding PLANTALUX primer   75035.9</b>   10 – 15 g/m <sup>2</sup> <b>PLANTALUX base coat   78722.1</b>   30 – 50 g/m <sup>2</sup> <b>PLANTALUX base coat   78722.8</b>   10 – 15 g/m <sup>2</sup> <b>PLANTALUX finish   78723.11</b>   10 – 20 g/m <sup>2</sup>	#	# # #	#	# # #
Good - Very good	Excellent	4 4	1 23	11












### **PLAQUADUR I REPAIR**

- Above-average wear resistance with good elastic properties
- Good adhesion
- Achieve more than 95% of the requirements of DIN EN 13442
- Meets the requirements of DIN EN 12720
- Can be sanded very well
- Good projection of the grain and warmth of the wood with an elegant surface feel
- Good transparency
- Very good levelling
- Formaldehyde-free
- Can also be used as 2 C product



#### **Sanding**

Base coat | 71968.20 | 180 - 240 g/m<sup>2</sup> | Drying time 5 h

PLAQUADUR Finish PLAQUADUR Finish

**71968.10** (Gloss 10) **78719.25 71968.30** (Gloss 30) **78719.96** 

 $180 - 240 \text{ g/m}^2 \mid \text{Drying time } 48 \text{ h}$   $180 - 240 \text{ g/m}^2 \mid \text{Drying time } 48 \text{ h}$ 


# PLAQUADUR ON SITE SEALING AND REPAIR OF PARQUET





### **PLACURA I CLEANER**

- Easy to apply and ready for use
- Fast drying, no polishing
- pH-neutral and formaldehyde-free




#### Easy-clean | 74216.98

1 cap to 1 l of water l Wipe the floor using a slightly damp cloth or mop

#### **PLACURA I CARE OIL**

- Aromatic compound and cobalt-free
- Easy to apply
- Refreshes the surface and supports the sealing
- Attractive feel and appearance
- Can also be used for repairs (with an appropriate layer thickness)



#### Easy-care | 74216.30a

Apply using a machine | Dries overnight

## PLANTAG EXTRA COMPLEMENTARY PRODUCTS

### **DECORATIVE PRODUCTS**

- STAINS | You can easily create your own colours (solvent and water-based stains in mixing sets)
- PASTES | Be creative Pored pastes, e.g. for whitewashing (colours can be mixed as required)



## **CLOSED-PORE BASE I** with filler | 72053.30

- **■** TRANSPARENT
- COLOURED | Stains or coloured filler



#### **PLANTAG Coatings GmbH**

Plantagenweg 34–38 32758 Detmold DEUTSCHLAND

Fon +49 5231 6002 0 Fax +49 5231 6002 21 E-Mail info@plantag.de Internet www.plantag.de

#### **JORDAN Lacke GmbH**

Plantagenweg 34–38 32758 Detmold DEUTSCHLAND

Fon +49 5231 6002 661 Fax +49 5231 6002 9661 E-Mail info@jordanlacke.de Internet www.jordanlacke.de

